


HEAD FRAME AND MOUNTING RING ASSEMBLY SCALE: N.T.S.

NOTE:

 A No.8 AWG CU BARE STRANDED GROUND CONDUCTOR SHALL BE RUN FROM THE SERVICE CONNECTING ALL POLES, THE GROUND CONDUCTOR IS TO BE 0.08m DIRECTLY ABOVE THE CONDUIT.

EFFECTIVE DATE: JUNE 1996

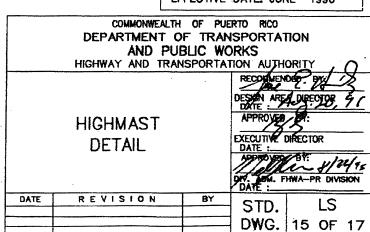

~ * **%**