




**CUT SECTIONS**

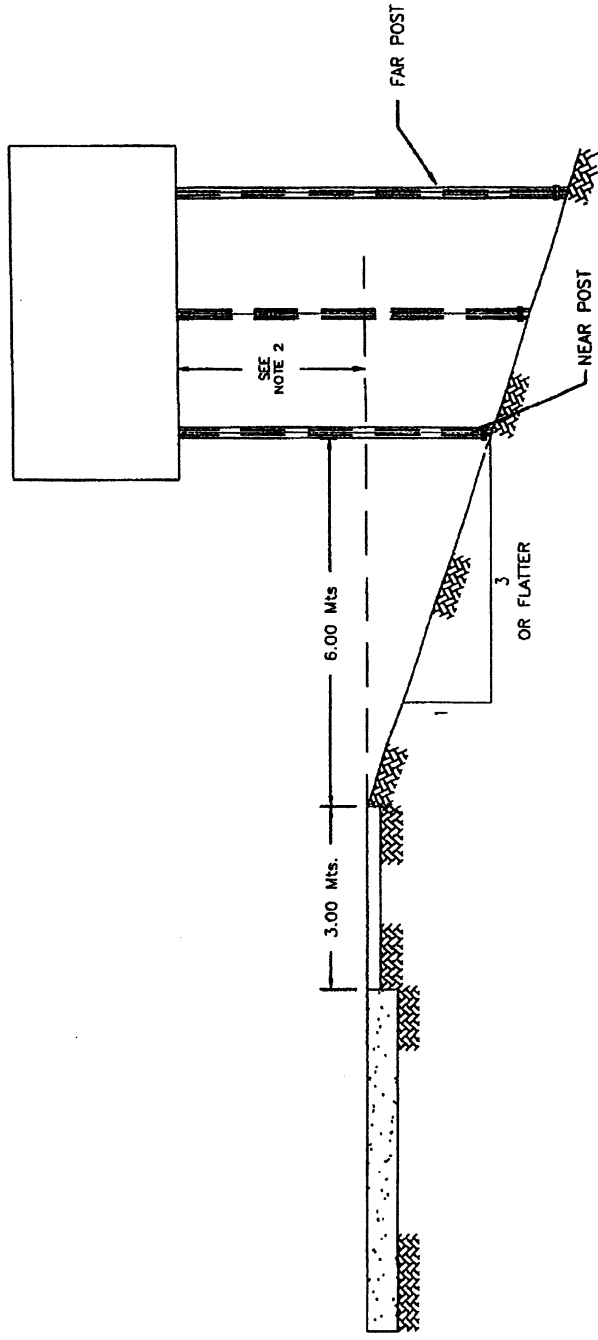

**EMBANKMENTS WITH SLOPES 3:1 OR FLATTER**

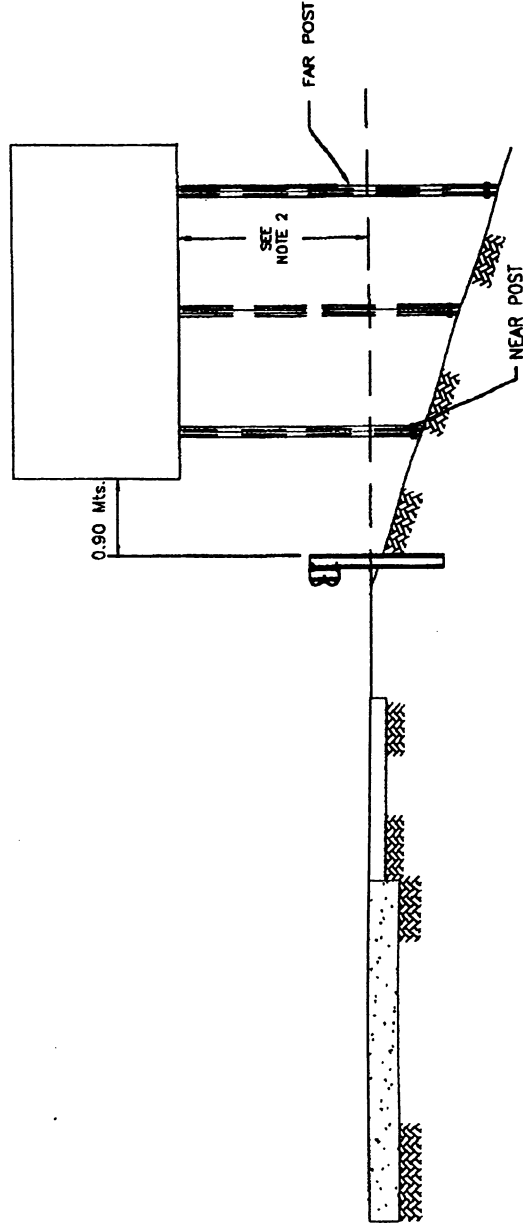

**SECTION WITH GUARD RAIL**

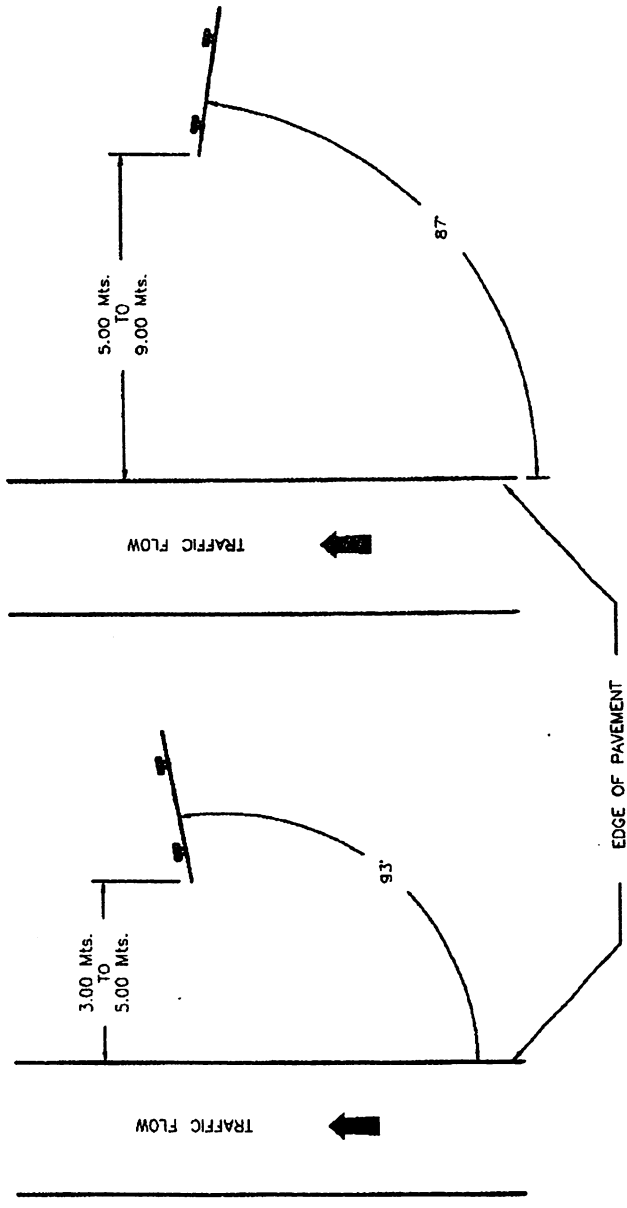

**ORIENTATION OF SIGNS**

**GENERAL NOTES:**

1. OFFSET APPLIES TO NEAR POST OR TO SINGLE POST WHEN SIGN HAS ONLY ONE POST.
2. VERTICAL CLEARANCE TO BOTTOM OF LOWEST SIGN PANEL SHALL BE 2,130 (7'-0") TO 2,300 (7'-6") FROM THE FINISH GRADE OF THE NEAREST LANE EDGE.

EFFECTIVE DATE: JULY 2000

COMMONWEALTH OF PUERTO RICO DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS HIGHWAY AND TRANSPORTATION AUTHORITY		RECOMMENDED BY:  DEPUTY EXEC. DIR. FOR TRAFFIC AND TOLL ROADS DATE: 11-1-00	APPROVED BY:  EXECUTIVE DIRECTOR DATE: MAY-19-00
<b>GROUND MOUNTED          BREAK-AWAY SIGNS</b> <b>OFFSET DRAWINGS</b> AUTOPISTA AND OTHER HIGHWAYS WITH 9 METER CLEAR ZONE			
DATE	REVISION	BY	GMTS
07-1999		LV	3 OF 15
03-2000	REVISED NOTE 2	LV	DWG.