



CUT SECTIONS

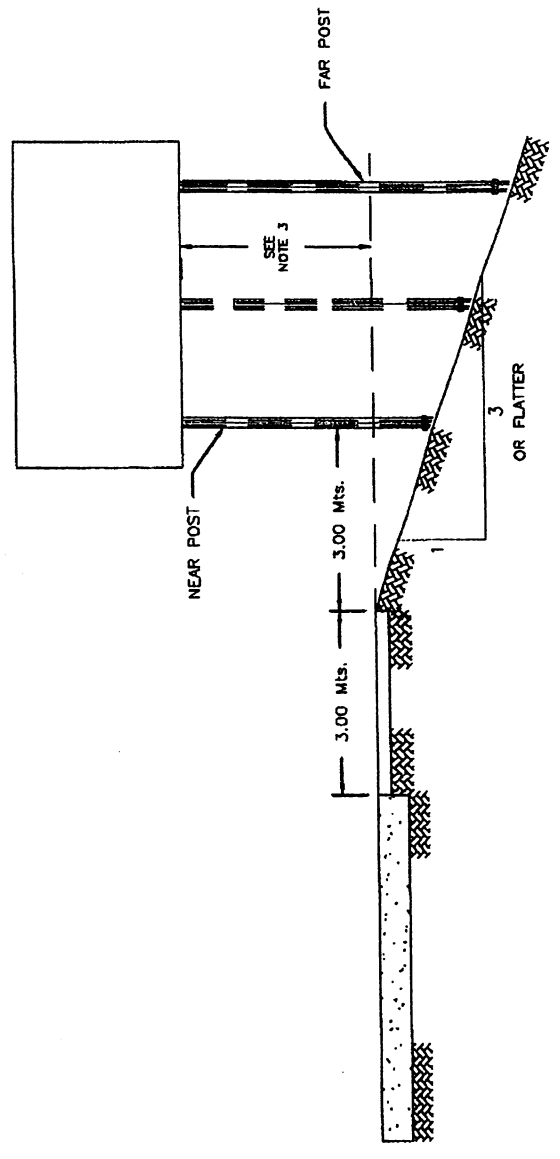

EMBANKMENTS WITH SLOPES 3:1 OR FLATTER

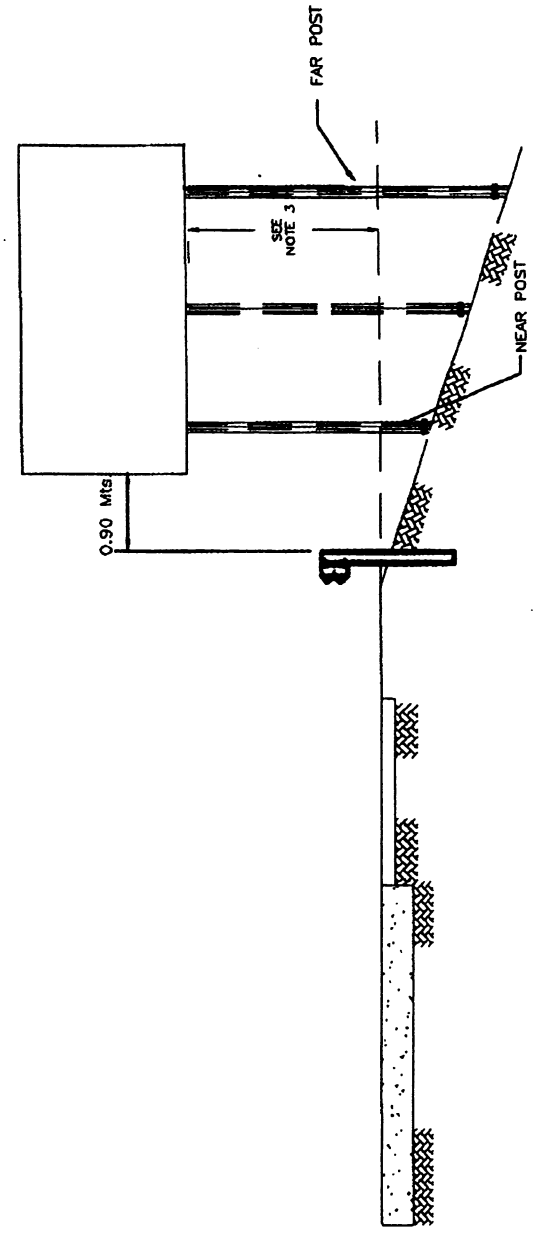

SECTION WITH GUARD RAIL

GENERAL NOTES:

1. FOR ORIENTATION OF SIGNS SEE ORIENTATION DETAILS.
2. OFFSET APPLIES TO NEAR POST OR TO SINGLE POST WHEN SIGN HAS ONLY ONE POST.
3. VERTICAL CLEARANCE TO BOTTOM OF LOWEST SIGN PANEL SHALL BE 2.130 (7'-0") TO 2.300 (7'-6") FROM THE FINISH GRADE OF THE NEAREST LANE EDGE.

EFFECTIVE DATE: JULY 2000

COMMONWEALTH OF PUERTO RICO DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS HIGHWAY AND TRANSPORTATION AUTHORITY		RECOMMENDED BY: DEPUTY EXEC. DIR. FOR TRAFFIC AND TOLL ROADS DATE: 17-V-02	APPROVED BY: EXECUTIVE DIRECTOR DATE: MAR-19-00
GROUND MOUNTED BREAK-AWAY SIGNS OFFSET DRAWINGS HIGHWAYS WITH INTERMEDIATE CLEAR ZONE		DATE 07-1999 03-2000	REVISION ADD NOTE REVISED NOTE 3
DATE 07-1999 03-2000	REVISION ADD NOTE REVISED NOTE 3	BY I.V. I.V.	STD. DWG. GMTS 4 OF 15