



SECTION 1-1


NOTES:
FOOTING TO BE PLACED WITH LONGEST SIDE PARALLEL TO ROADWAY.

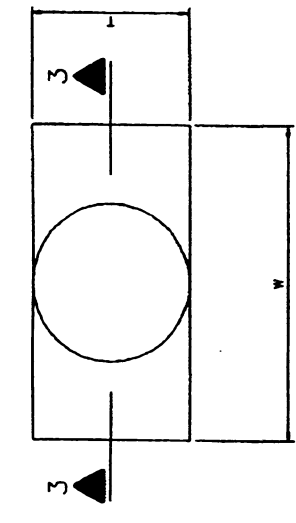

PLAN

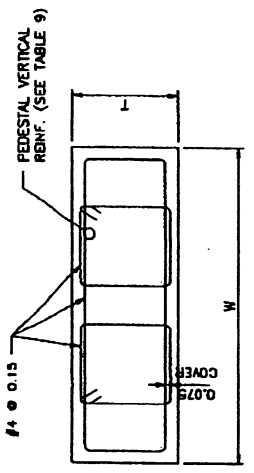

TYPICAL PEDESTAL SECTION

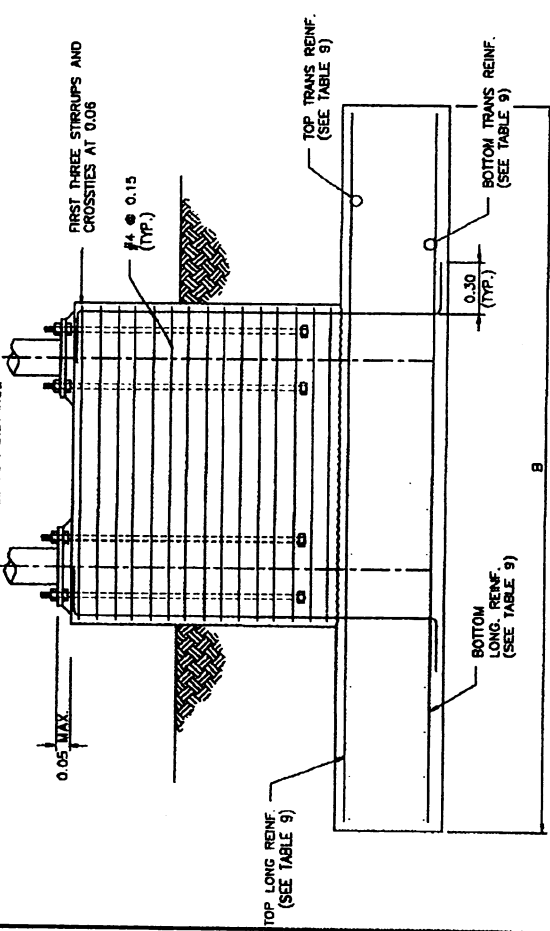


SECTION 2-2

NOTES:
PEDESTAL VERTICAL REINF. TABLE NOT SHOWN.


SPREAD FOOTING

TABLE 9

TYPE	SPREAD FOOTING						DRILLED SHAFT											
	FOOTING DIMENSION		TOP REINF.		BOTTOM REINF.		DIA.	LENGTH	PEDESTAL SIZE		PEDESTAL VERTICAL REINF.							
	A	B	LONG	TRANS.	LONG	TRANS.			T	W	No.	Bar	No.	Bar				
IV-A	0.60	1.80	30	#6	6	#4	10	#4	6	#6	10	#6	12	#8	0.90	1.80	34	#6
IV-B	0.60	1.80	30	#6	6	#4	10	#4	6	#6	10	#6	12	#8	0.90	1.80	34	#6
IV-C	0.60	1.80	30	#6	6	#4	10	#4	6	#6	11	#6	12	#8	0.90	1.80	34	#6
IV-D	0.60	1.80	30	#6	6	#4	8	#4	6	#6	8	#6	12	#8	0.90	1.80	34	#6

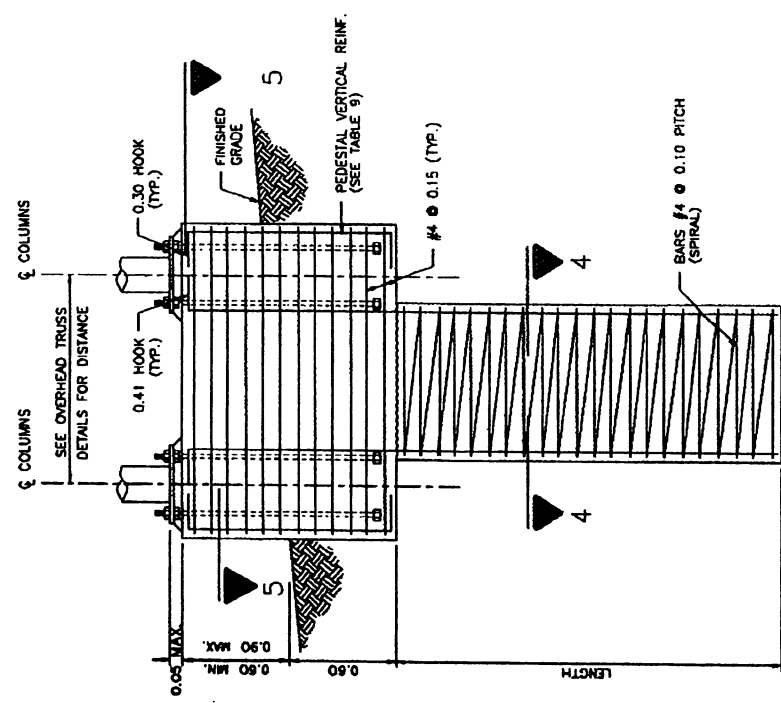


SECTION 3-3

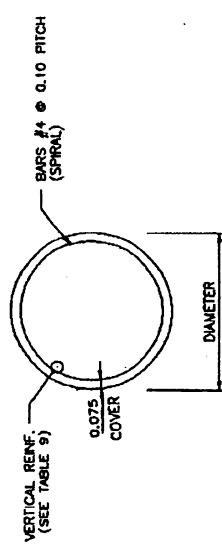

SECTION 4-4

DRILLED SHAFT

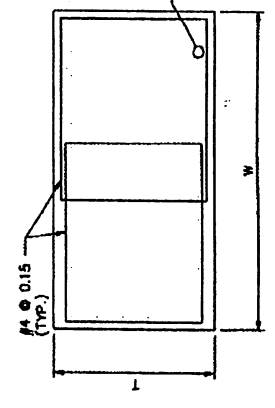

SECTION 5-5

GENERAL NOTES:

REFER TO:

1. ASHTO - STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORT FOR HIGHWAY SIGN LUMINAIRES AND TRAFFIC SIGNALS - SECOND DRAFT, MAY 1988 OR LATER DRAFTS OF SAO SPECIFICATION BRIDGES.
2. ASHTO - STANDARD SPECIFICATIONS FOR HIGHWAY BRIDGES.

DESIGN LOADS:

1. WIND - 125 M.P.H.
2. ALLOWABLE BEARING PRESSURE 2000 P.S.F.
3. INTERNAL FRICTION ANGLE $\phi = 22^\circ$

MATERIALS:

1. CONCRETE: CLASS A - $f'_c = 3,000$ psi
2. STEEL: REINFORCING STEEL ASHTO M31 (ASTM A615) GRADE 60.

CONCRETE COVER:

1. FOOTING: BOIT 0.075
2. DRILLED SHAFT: TOP & SIDES 0.075
3. PEDESTAL: TOP 0.05, SIDES 0.075

MISCELLANEOUS:

1. ALL EXPOSED CONCRETE CORNERS SHALL BE CHAMFERED 0.025, WHETHER OR NOT SUCH CHAMFERS ARE SHOWN ON THE PLAN DETAILS.
2. PRIOR TO ERECTION OF THE POST, THE BACKFILL MATERIAL SHALL BE IN PLACE.

NOTES:

1. THE CONTRACTOR IS RESPONSIBLE FOR THE DESIGN OF ANY TESTS, THEIR NUMBERS AND LOCATIONS OF ANCHORING IN CONFORMANCE WITH THE ASHTO DOCUMENTS AND DESIGN LOADS INCORPORATED IN THE GENERAL NOTES.
2. THE CONTRACTOR IS RESPONSIBLE FOR LOCATING UNDERGROUND OBSTRUCTIONS TO THE CONSTRUCTION OF THE OVERHEAD FOOTING BY MEANS OF TEST PITS. REMOTE SENSING OR ANY OTHER METHOD SELECTED BY THE CONTRACTOR. IF OBSTRUCTIONS ARE DETECTED, THE CONTRACTOR SHALL AVOID THEM BY USING THE DRILLED SHAFT FOOTING OR RELOCATING THE SIGN STRUCTURE WITH THE CONSENT OF THE ENGINEER. THE EXPLORATION FOR THE UNDERGROUND OBSTRUCTIONS AND RELOCATION STRUCTURES ARE A SUBSIDIARY OBLIGATION OF THE CONTRACTOR.
3. ON CAST IN PLACE DRILLED SHAFTS, THE CONCRETE SHALL BE POURED AGAINST UNDISTURBED SOIL.
4. THE CONTRACTOR MAY ELECT TO CONSTRUCT A SPREAD FOOTING OR THE DRILLED SHAFT FOOTING PROVIDED THEY DO NOT CONFLICT WITH UNDERGROUND OBSTRUCTIONS, MAINTENANCE OF TRAFFIC CONSIDERATIONS, ROCK LAYER OR ANY OTHER SITE CONSTRAINTS. IF SITE CONSTRAINTS PREVENT THE USE OF A TYPE OF FOOTING, THE CONTRACTOR SHALL DESIGN AND CONSTRUCT A MODIFIED FOOTING SUITABLE TO THE SITE AS A SUBSIDIARY OBLIGATION AND SUBJECT TO THE APPROVAL OF THE AUTHORITY.
5. WHEN THE METAL OVERHEAD SIGN STRUCTURE SELECTED BY THE CONTRACTOR DOES NOT FIT THE SPREAD FOOTING OR DRILLED SHAFT, IT WILL BE THE CONTRACTOR'S RESPONSIBILITY TO SUBMIT SHOP DRAWINGS TO THE ENGINEER MAKING THE NECESSARY ADJUSTMENTS TO THE PROPOSED FOOTING.
6. THE CONTRACTOR MAY ELECT TO PROVIDE PRECAST SPREAD FOOTINGS OR DRILLED SHAFTS IDENTICAL TO THE ONES SHOWN. IF THE PRECAST OPTION IS USED, ALL BACKFILL WILL BE MADE WITH CLEAN SAND.

SECTION 1-1

NOTES:
PEDESTAL VERTICAL REINF. TABLE NOT SHOWN.

SPREAD FOOTING

TABLE 9

TYPE	SPREAD FOOTING						DRILLED SHAFT											
	FOOTING DIMENSION		TOP REINF.		BOTTOM REINF.		DIA.	LENGTH	PEDESTAL SIZE		PEDESTAL VERTICAL REINF.							
	A	B	LONG	TRANS.	LONG	TRANS.			T	W	No.	Bar	No.	Bar				
IV-A	0.60	1.80	30	#6	6	#4	10	#4	6	#6	10	#6	12	#8	0.90	1.80	34	#6
IV-B	0.60	1.80	30	#6	6	#4	10	#4	6	#6	10	#6	12	#8	0.90	1.80	34	#6
IV-C	0.60	1.80	30	#6	6	#4	8	#4	6	#6	8	#6	12	#8	0.90	1.80	34	#6
IV-D	0.60	1.80	30	#6	6	#4	8	#4	6	#6	8	#6	12	#8	0.90	1.80	34	#6

EFFECTIVE DATE: JULY 2000

COMMONWEALTH OF PUERTO RICO
DEPARTMENT OF TRANSPORTATION
AND PUBLIC WORKS
HIGHWAY AND TRANSPORTATION AUTHORITY

OVERHEAD SIGNS
FOUNDATION FOR
BRIDGE WITH
CANTILEVER TYPE
FOUNDATION B (TWO POSTS)

DATE	REVISION	BY
05-2000		I.V.

STD. OHTS
DWG. 17 OF 20

RECOMMENDED BY:
DEPUTY EXEC. DIR. FOR
TRAFFIC AND TOLL ROADS
DATE: 10-1-00

APPROVED BY:
EXECUTIVE DIRECTOR
DATE: 1/17/01