




**PIER  
STANDARD MOUNTING**

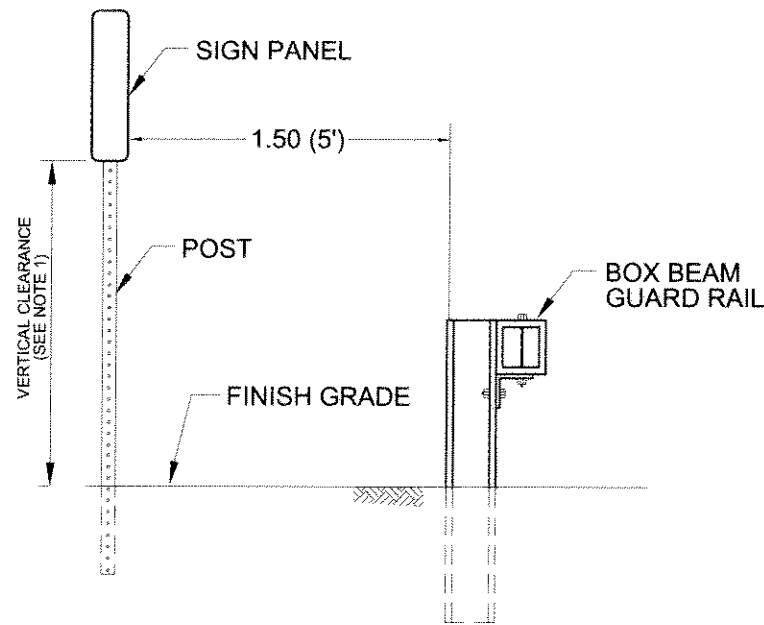

**WEAK POST BOX-BEAM GUARD RAIL  
STANDARD MOUNTING**

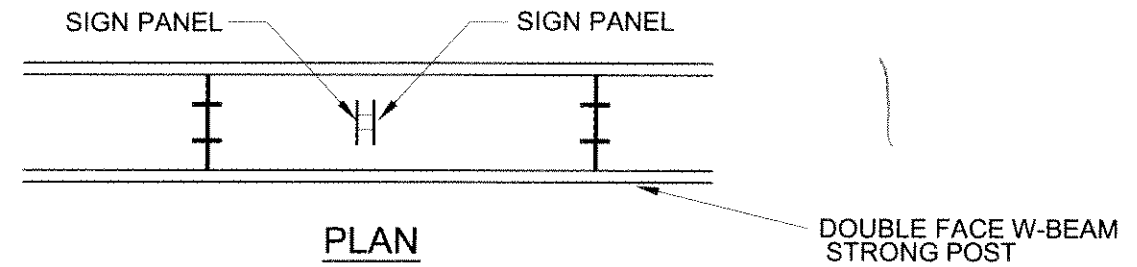

**PLAN**

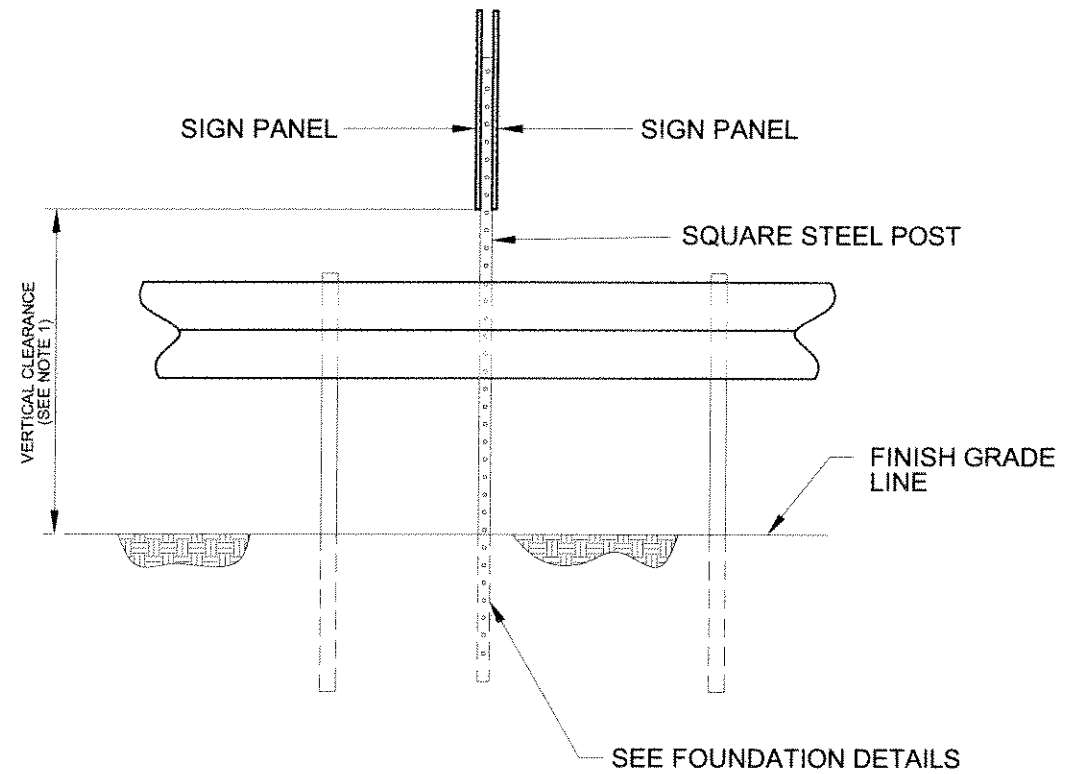

**DOUBLE FACE W-BEAM  
STRONG-POST  
STANDARD MOUNTING**

**NOTES:**

1. VERTICAL CLEARANCE TO BOTTOM OF LOWEST SIGN PANEL SHALL BE AS INDICATED IN THE GENERAL NOTE 3 OF SHEET RLS-01.
2. FOR INSTALLATION ON SINGLE FACE METAL BARRIERS, KILOMETER AND HECTOMETER REFERENCE SIGN SHALL BE MOUNTED ON THE NON-FACING TRAFFIC SIDE.
3. FOR DOUBLE FACE METAL BARRIER, KILOMETER AND HECTOMETER REFERENCE SIGN SHALL BE MOUNTED BETWEEN GUARD RAIL POSTS.
4. DISTANCE FROM EDGE OF SIGN PLATE TO ANCHOR BOLT SHALL BE AS INDICATED ON ASSEMBLY DETAILS.

DATE	BY	REVISION	DATE	BY	REVISION
AUG. 99		ORIGINAL			
JUL. 09		PAGE RE numbering			



COMMONWEALTH OF PUERTO RICO  
DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS  
HIGHWAY AND TRANSPORTATION AUTHORITY

STANDARD DRAWING APPROVED BY:

DATE: 2/2/10	ASSISTANT EXECUTIVE DIRECTOR FOR INFRASTRUCTURE	DATE: 1/28/10	ASSISTANT EXECUTIVE DIRECTOR FOR TRAFFIC AND TOLL ROADS
--------------	---	---------------	---

REFERENCE LOCATION SIGN  
TYPICAL INSTALLATION

RLS-12

JANUARY 2010