


NOTES:

- VERTICAL CLEARANCE TO BOTTOM OF LOWEST SIGN PANEL SHALL BE AS INDICATED IN THE GENERAL NOTE 3 OF SHEET RLS-01.
- 2. ONLY SQUARE STEEL POST SHALL BE USED FOR SINGLE MOUNTINGS ON BRIDGES AND CONCRETE BARRIER.
- 3. THE EXPANSION ANCHOR SHALL HAVE ELECTRO PLATED ZINC COATING IN ACCORDANCE WITH ASTM B633, TYPE III FE/ZN 5.
- 4. THE CONTRACTOR SHALL FOLLOW MANUFACTURER'S INSTRUCTIONS FOR INSTALLATION OF EXPANSION ANCHOR.
- 5. FOR INSTALLATION ON NEW CONCRETE BARRIER, THE CONCRETE BARRIER SHALL HAVE THE BASE POST FOUNDED.
- FOR INSTALLATION ON EXISTING CONCRETE BARRIER, THE CONTRACTOR SHALL DRILL 4" DIA. AND 4" DEPTH IN ORDER TO INSTALL BASE POST AND BACKFILL WITH NON SHRINKING GROUT AS A SUBSIDIARY OBLIGATION. IN CASE OF DAMAGE ON GEOMETRIC SHAPE OF CONCRETE BARRIER, THE CONTRACTOR SHALL RESTORE IT WITH CONCRETE AS A SUBSIDIARY OBLIGATION.
- 7. FOR APPROVED NON-SHRINKING GROUT, SEE NOTE 3 OF PCC PAVEMENT RESTORATION-JOINT DETAIL (PCCPR) ON THE STANDARD DRAWINGS.
- 8. IN CONCRETE BARRIER STANDARD MOUNTING ONLY D10-1, D10-1a, D10-2, D10-2a, D10-3, AND D10-3a POST MARKERS CAN BE INSTALLED.

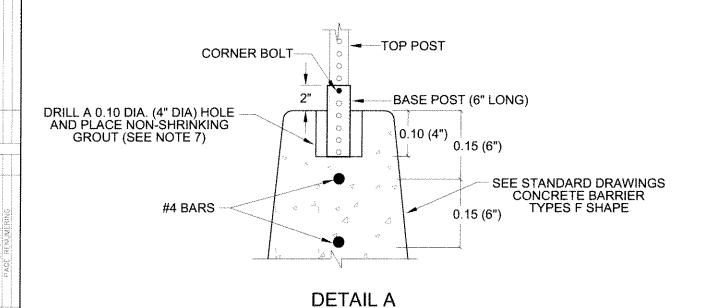

COMMONWEALTH OF PUERTO RICO DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS HIGHWAY AND TRANSPORTATION AUTHORITY

STANDARD DRAWING APPROVED BY: 31210 1/25/10 SISTANT EXECUTIVE DIRECTOR DATE

ASSISTANT EXECUTIVE DIRECTOR FOR TRAFFIC AND TOLL ROADS

REFERENCE LOCATION SIGN

RLS-11

JANUARY 2010

TYPICAL INSTALLATIONS