


DATE	REVISION	BY
AUG. 99 <td>ORIGINAL <td></td> </td>	ORIGINAL <td></td>	
JUL. 09 <td>PAGE RE-NUMBERING <td></td> </td>	PAGE RE-NUMBERING <td></td>	

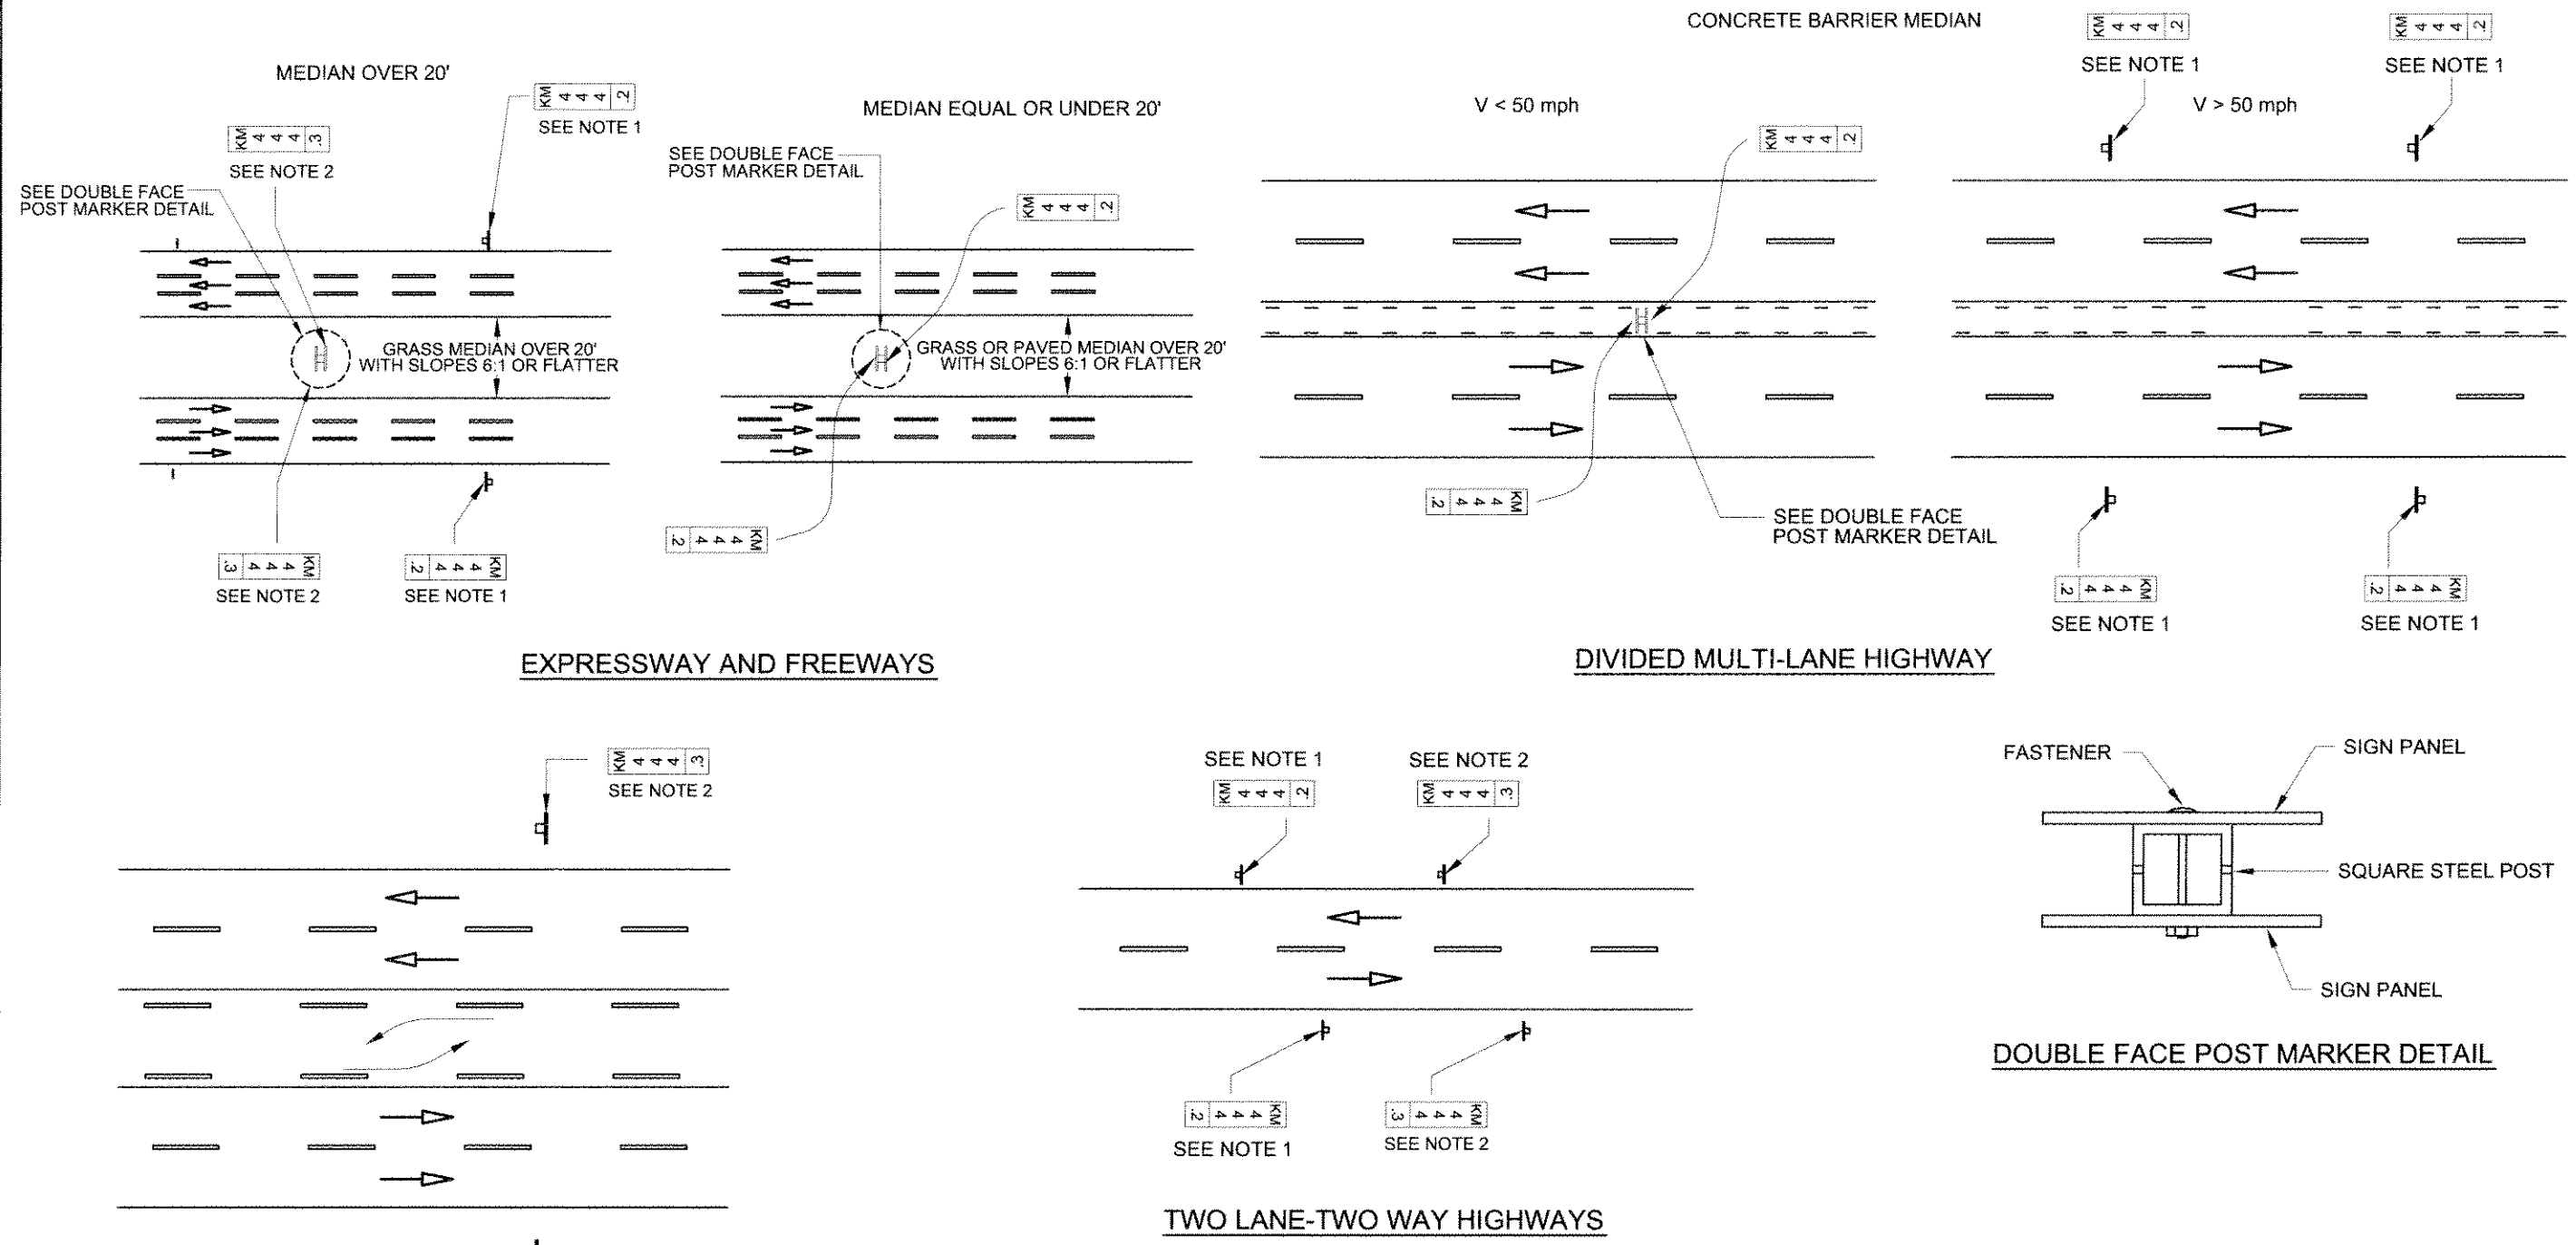

NOTES:

1. EVEN NUMBERED HECTOMETER MARKERS SHALL BE INSTALLED ON THE RIGHT SIDE OF THE HIGHWAY FACING TRAFFIC.
2. ODD NUMBERED HECTOMETER MARKERS SHALL BE INSTALLED ON THE LEFT SIDE OF THE HIGHWAY FACING TRAFFIC.
3. MARKERS SHALL BE INSTALLED ACCORDING TO STANDARD DRAWINGS UNLESS INDICATE OTHERWISE IN THE PLANS.
4. THE CONTRACTOR MAY USE STEEL FLANGED CHANNEL POST OR SQUARE STEEL POST FOR ANY APPLICATION. FOR APPLICATION WHERE DOUBLE FACE POST MARKER WILL BE USED ONLY SQUARE STEEL POST IS PERMITTED.
5. FOR OFFSET IN DIFFERENT TYPICAL PLACEMENT SEE OFFSET DRAWINGS.
6. THE KILOMETER MARKER WITH INTEGER NUMBERS SHALL BE PLACED IN BOTH SIDES OF THE HIGHWAY.

	COMMONWEALTH OF PUERTO RICO DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS HIGHWAY AND TRANSPORTATION AUTHORITY		INTERIM STANDARD DRAWING:		REFERENCE LOCATION SIGN TYPICAL POST MARKER PLACEMENT	RLS-13 JANUARY 2010
	DATE: 08/21/10	ASSISTANT EXECUTIVE DIRECTOR FOR INFRASTRUCTURE	DATE: 1/25/10	ASSISTANT EXECUTIVE DIRECTOR FOR TRAFFIC AND TOLL ROADS		