




**SIDEWALK OR CONCRETE
PAVED AREA**

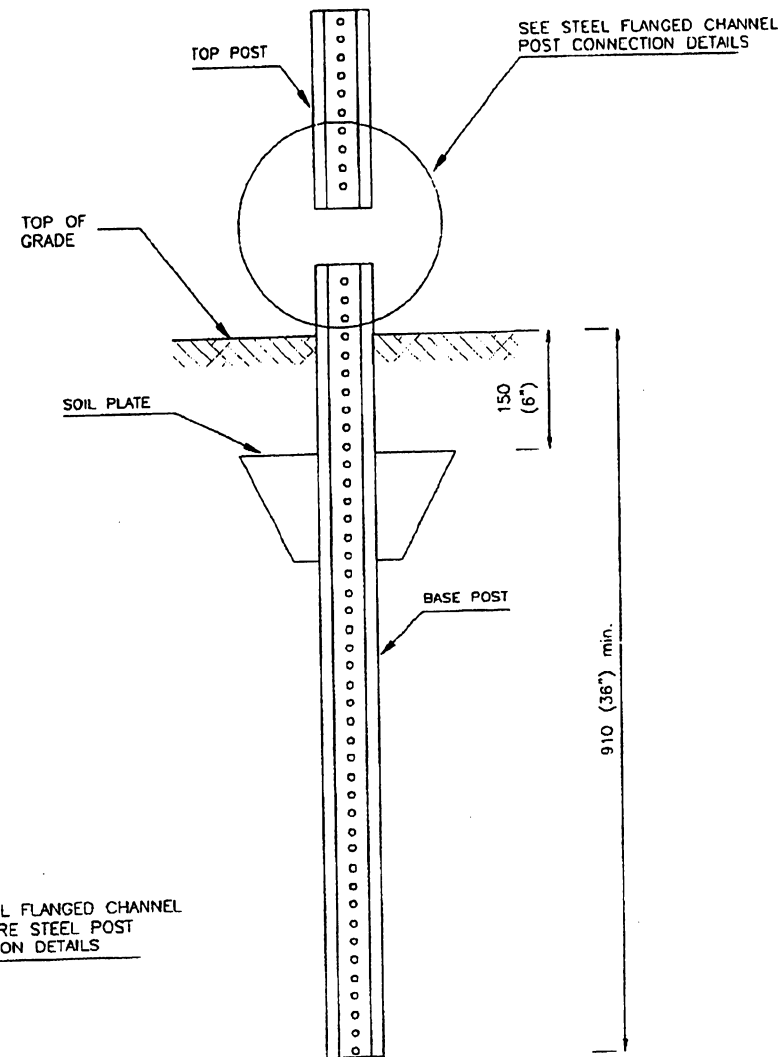

**NATURAL SOIL
USE SOIL PLATE**

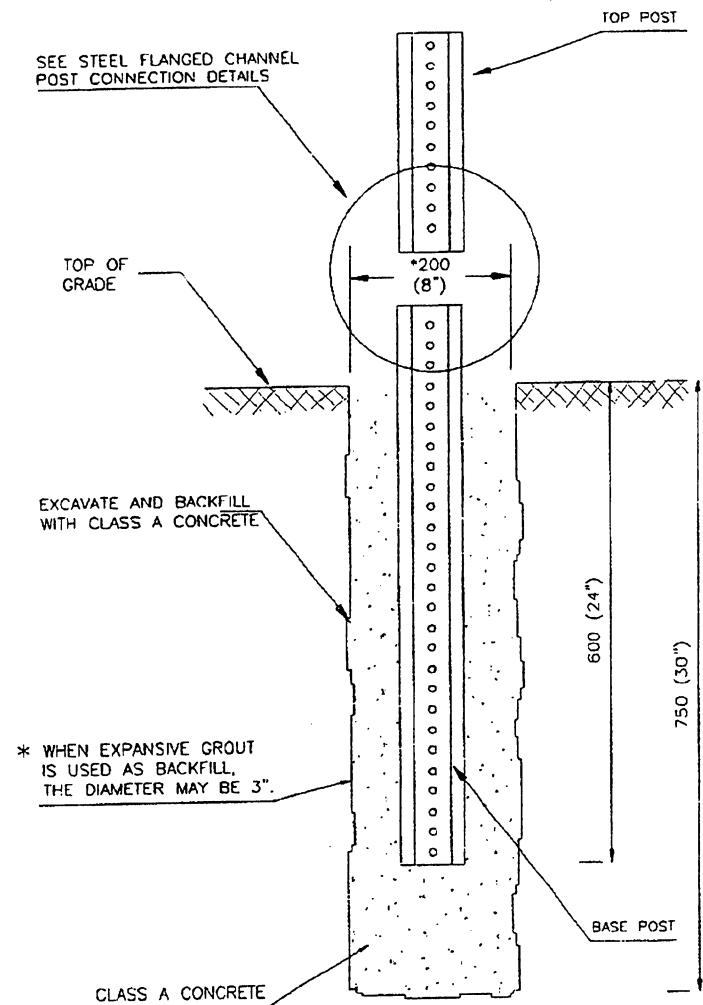

ROCK CONDITION

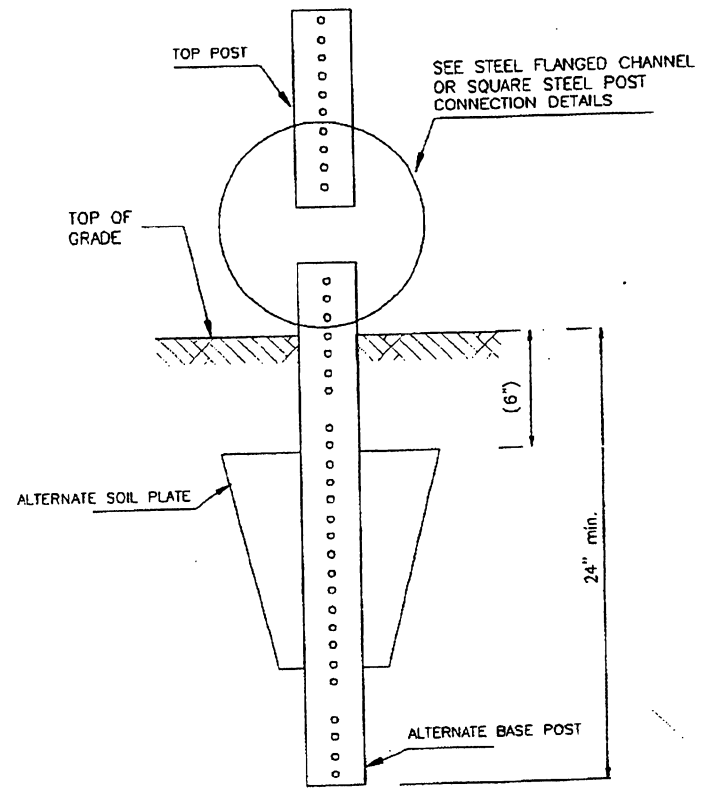

**NATURAL SOIL
ALTERNATE BASE POST AND SOIL PLATE**

GENERAL NOTES:

1. THE CONTRACTOR SHALL USE APPROPRIATE SIZE DRIVE CAP TO DRIVE POSTS.
2. FOR SIDEWALK OR CONCRETE PAVED AREA, THE CONTRACTOR SHALL CORE SIDEWALK SLAB 4" D AND BACKFILL WITH CLASS A CONCRETE AS A SUBSIDIARY OBLIGATION.
3. FOR ROCK CONDITION, THE CONTRACTOR SHALL EXCAVATE (8" DIAMETER HOLE) AND BACKFILL WITH CLASS A CONCRETE OR EXCAVATE (3" DIAMETER HOLE) AND BACKFILL WITH EXPANSIVE GROUT AS A SUBSIDIARY OBLIGATION.

EFFECTIVE DATE: OCTOBER 2000

COMMONWEALTH OF PUERTO RICO
DEPARTMENT OF TRANSPORTATION
AND PUBLIC WORKS
HIGHWAY AND TRANSPORTATION AUTHORITY

**SMALL TRAFFIC SIGNS
STEEL FLANGED
CHANNEL POST
FOUNDATION DETAILS**

RECOMMENDED BY:
[Signature]
DEPUTY EXC. DIR. FOR
TRAFFIC AND TOLL ROADS
DATE 2-1-2000

APPROVED BY:
[Signature]
EXECUTIVE DIRECTOR
DATE 2-1-2000

DATE	REVISION	BY
02-99	GENERAL REVISION	I.V.
10-1999	ADD NOTE 11& 12	I.V.
09-2000	ADDED ALTERNATIVE FOUNDATION	I.V.

STD. DWG. 2 OF 25