

H SUPPORT MOUNTING

1. FOR SIGN PANELS WITH A SIGN PANEL AREA EQUAL OR LESS THAN 2.6 SQUARE METERS, 28 SQUARE FEET
2. FOR SIGN PANELS WITH A SIGN PANEL AREA GREATER THAN 28 SQF USE GROUND MOUNTED BREAK-AWAY INSTALLATION.

CANTILEVER SUPPORT MOUNTING

1. FOR SQUARE, RECTANGULAR, PENTAGONAL, OCTAGONAL, DIAMOND AND EQUILATERAL TRIANGLE SIGN PANEL WITH A MAXIMUM HORIZONTAL WIDTH GREATER THAN 600 (24").
2. FOR OCTAGONAL, DIAMOND, TOURISTIC AND CIRCULAR SIGN PANEL WITH A MAXIMUM HORIZONTAL WIDTH EQUAL OR LESS THAN 600 (24").

GENERAL NOTES:

1. VERTICAL CLEARANCE TO BOTTOM OF LOWEST SIGN PANEL SHALL BE 2.130 (7'-0") TO 2.300 (7'-6") FROM SIDEWALK GRADE.
2. THE CONTRACTOR MAY USE STEEL FLANGED CHANNEL POST OR SQUARE STEEL POST.
3. THE FOUNDATIONS SHALL BE AS INDICATED FOR STEEL FLANGED CHANNEL AND SQUARE STEEL POST FOUNDATION DETAILS STANDARD DRAWING. TOP POST TO BASE POST CONNECTION SHALL BE AS INDICATED FOR STEEL FLANGED CHANNEL AND SQUARE STEEL POST CONNECTION DETAILS STANDARD DRAWING.
4. THE CONTRACTOR SHALL USE FLAT PLATES FOR POST TO STIFFENERS CONNECTION.
5. ALL TOP POSTS AND BASE POSTS SHALL BE CONTINUOUS IN LENGTH.
6. THE MAXIMUM AREA PERMITTED FOR SINGLE AND CANTILEVER SUPPORT MOUNTING SHALL BE 6 SQUARE FEET.
7. STIFFENERS SHALL BE SQUARE POST, STEEL FLANGED CHANNEL OR ALTERNATE STIFFENER.
8. MINIMUM OFFSET FROM CURB LINE TO SIGN PANEL SHALL BE 600 (24") MIN.
9. THE CONTRACTOR SHALL LOCATE POST AND STIFFENERS AS PER TYPICAL POST LOCATION FOR MOUNTING ON SIDEWALK AREAS WITH OR WITHOUT PLANTING STRIP STANDARD DRAWINGS.

EFFECTIVE DATE: JULY 2000

COMMONWEALTH OF PUERTO RICO
DEPARTMENT OF TRANSPORTATION
AND PUBLIC WORKS
HIGHWAY AND TRANSPORTATION AUTHORITY



SMALL TRAFFIC SIGNS
STEEL FLANGED CHANNEL
AND
SQUARE STEEL POST
MOUNTING ON SIDEWALK AREAS
WITH PLANTING STRIP

RECOMMENDED BY:
[Signature]
DEPUTY EXC. DIR. FOR
TRAFFIC AND TOLL ROADS
DATE: 17-V-00

APPROVED BY:
[Signature]
EXECUTIVE DIRECTOR
DATE: MAY-19-00

DATE	REVISION	BY
07-1999	ADD NOTE	I.V.
10-1999	GENERAL REVISION	I.V.
03-2000	REVISED NOTES	I.V.

STD. DWG. 11 OF 25

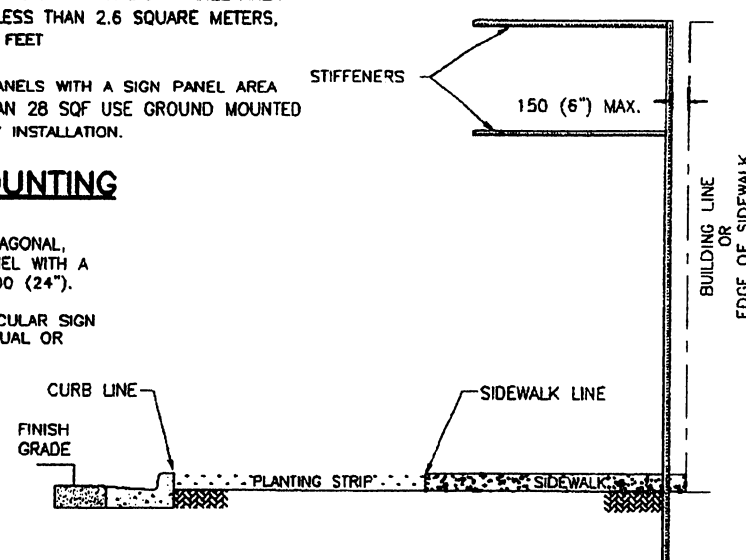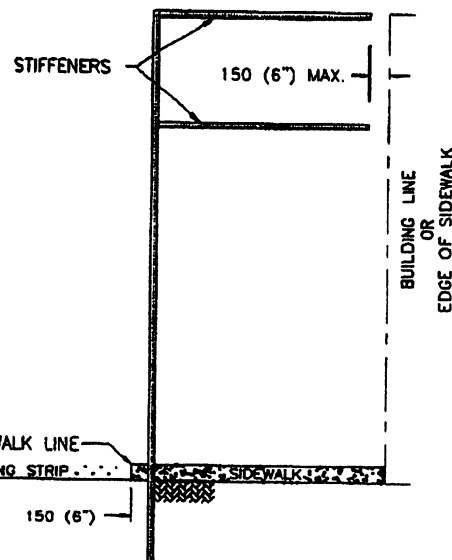

SINGLE SUPPORT MOUNTING

1. FOR SQUARE AND RECTANGULAR SIGN PANEL WITH A MAXIMUM HORIZONTAL WIDTH EQUAL OR LESS THAN 600 (24").
2. FOR ISOSCELES TRIANGLE SIGN PANEL USE SINGLE SUPPORT MOUNTING.

