




PAVEMENT TRENCH REPAIR DIMENSIONS IN METERS NOT TO SCALE

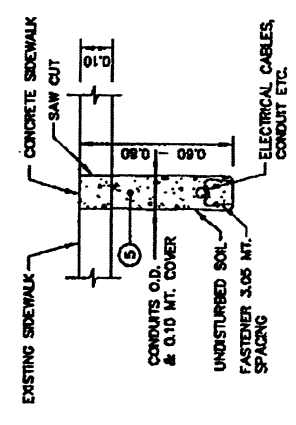


SIDEWALK TRENCH REPAIR DIMENSIONS IN METERS NOT TO SCALE

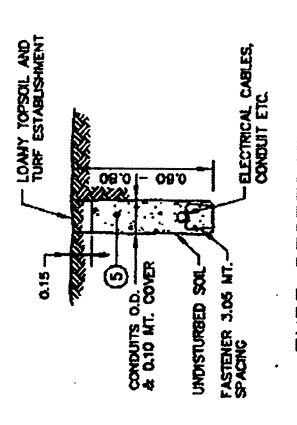


TURF RESTORATION DIMENSIONS IN METERS NOT TO SCALE

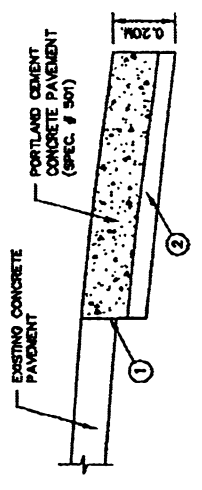

REPAIR OF CONCRETE PAVEMENT DIMENSIONS IN METER NOT TO SCALE

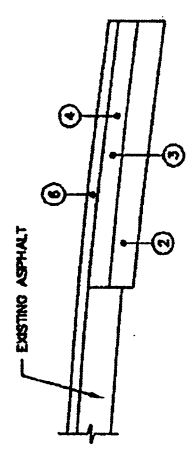

REPAIR OF ASPHALT PAVEMENT NOT TO SCALE

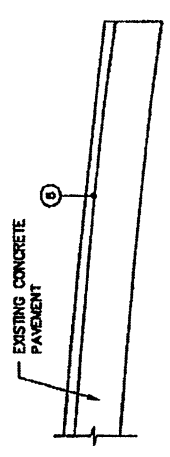


FOR REPAVEMENT NOT TO SCALE

NOTES:

- 1 EXISTING OR BARED JOINTS (SEE SPECIAL PROVISION).
- 2 0.15M. CRUSHED STONE BASE COURSE CLASS (2) GRADING (B-1).
- 3 0.10M. HOT PLANT MIX BITUMINOUS BASE COURSE (MIX TYPE B-1).
- 4 0.050M. HOT PLANT MIX BITUMINOUS PAVEMENT - MIX TYPE S-1, SP-401.
- 5 CONCRETE BACKFILL NO LESS THAN 0.45MT. VERTICAL DIMENSION. USE CLASS B CONCRETE.
- 6 0.038M. HOT PLANT MIX BITUMINOUS PAVEMENT, MIX S-1.

IMPORTANT NOTES:

CONCRETE AGGREGATE FOR MIX (1)-(5) SHALL COMPLY WITH THE FOLLOWING REQUIREMENTS FOR MIX "C" SPECIFICATIONS 403

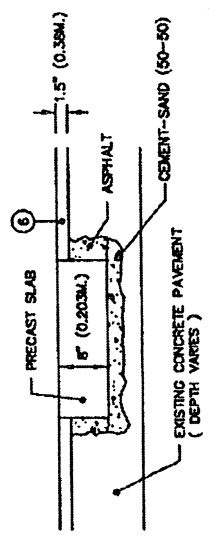

SLAB PLACEMENT IN EXISTING CONCRETE PAVEMENT OR EXISTING OVERLAYED CONCRETE PAVEMENT NOT TO SCALE

IMPORTANT NOTE:

EXCAVATION FOR THE INSTALLATION OF CONCRETE SLAB FOR LOOP DETECTOR IS A SUBSIDIARY OBLIGATION OF THIS ITEM INDEPENDENTLY OF THE TYPE OF PAVEMENT.

EFFECTIVE DATE: OCTOBER 1997

COMMONWEALTH OF PUERTO RICO
DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS
HIGHWAY AND TRANSPORTATION AUTHORITY

TRAFFIC SIGNAL CONTROLLER FOUNDATION, SERVICE INSTALLATION AND TRENCH REPAIR

RECOMMENDED BY: [Signature]
EXC. DIR. ASS. FOR TRAFFIC DATE: 11-28-97
APPROVED BY: [Signature]
EXECUTIVE DIRECTOR DATE: 12-28-97
APPROVED: [Signature]
DIV. ADM. FHWA-PR DIVISION DATE: 1-23-98

DATE	REVISION	BY	STD.	TRSI

DWG. 10 OF 14