

M1-6A  
FOR GUIDE SIGN USE  
COLORS


SHIELD - BLUE (REFL)  
BORDER AND NUMERALS - WHITE (REFL)

SIGN	DIMENSIONS (INCHES)									
	A	B	E	F	G	J	K			
1 DIGIT	36	36	22 D	9.22	12.75	22.5	.75			
2 DIGITS	36	36	18 D	11.84	12.75	22.5	.75			
3 DIGITS	36	36	14 C	14.18	12.75	22.5	.75			
1 DIGIT	30	30	18 D	7.68	10.63	18.75	0.63			
2 DIGITS	30	30	15 D	9.87	10.63	18.75	0.63			
3 DIGITS	30	30	12 C	11.82	10.63	18.75	0.63			
1 DIGIT	24	24	14 D	6.14	8.50	15.00	0.50			
2 DIGITS	24	24	12 D	7.90	8.50	15.00	0.50			
3 DIGITS	24	24	10 C	9.46	8.50	15.00	0.50			

OPTICALLY SPACE NUMERALS ABOUT  
VERTICAL CENTER LINE

GUIDE SIGNS WORD SIZES  
AND ROUTE MARKERS SIZES

WORD SIZE	ROUTE MARKERS SHIELD SIZE
20"/15", 16"/12"	36" X 36"
13.3"/10"	30" X 30"
10.6"/8"	24" X 24"

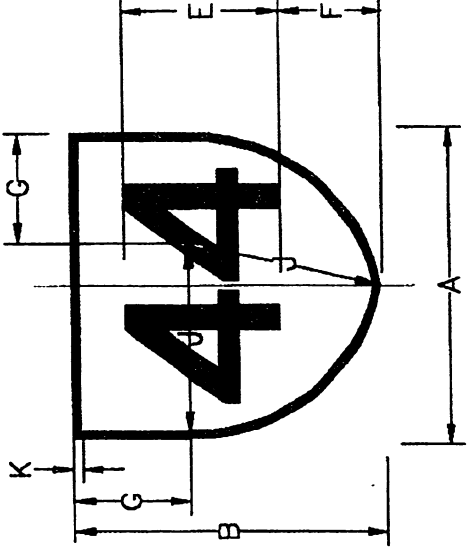

M1-6B  
FOR GUIDE SIGN USE  
COLORS

SHIELD - WHITE (REFL)  
BORDER AND NUMERALS - BLACK (NON-REFL)

SIGN	DIMENSIONS (INCHES)									
	A	B	E	F	G	J	K			
1 DIGIT	36	36	22 D	9.22	12.75	22.5	.75			
2 DIGITS	36	36	18 D	11.84	12.75	22.5	.75			
3 DIGITS	36	36	14 C	14.18	12.75	22.5	.75			
1 DIGIT	30	30	18 D	7.68	10.63	18.75	0.63			
2 DIGITS	30	30	15 D	9.87	10.63	18.75	0.63			
3 DIGITS	30	30	12 C	11.82	10.63	18.75	0.63			
1 DIGIT	24	24	14 D	6.14	8.50	15.00	0.50			
2 DIGITS	24	24	12 D	7.90	8.50	15.00	0.50			
3 DIGITS	24	24	10 C	9.46	8.50	15.00	0.50			

OPTICALLY SPACE NUMERALS ABOUT  
VERTICAL CENTER LINE

GENERAL NOTE

1. THESE ROUTE MARKER SHIELD SHALL BE USED ON GUIDE AND DIAGRAMMATIC SIGNS.
2. SLANTED BAR (S) SIGNIFIES SEPARATION OF UPPER-CASE AND LOWER-CASE ALPHABETS.

EFFECTIVE DATE: AUGUST 1999

COMMONWEALTH OF PUERTO RICO  
DEPARTMENT OF TRANSPORTATION  
AND PUBLIC WORKS  
HIGHWAY AND TRANSPORTATION AUTHORITY

RECOMMENDED BY:  
ASST. ENGR. DIR. FOR TRAFFIC  
DATE: 8-1-99  
APPROVED BY:  
EXECUTIVE DIRECTOR  
DATE:  
APPROVED BY:  
SECRETARY S. 409.49  
DATE:  
APPROVED BY:  
ENR. ADM. PHOT. BY DIVISION  
DATE: 8-1-99

GUIDE SIGNS  
ROUTE MARKERS  
FOR GUIDE SIGNS USE

DATE	REVISION	BY

STD. GS  
DWG. 2 OF 50